

Datasheet				
Mod.	Dwg n.	Date	Check	Rev.
P6GD	941113	19/10/2016	AC	0

FIRE EXTINGUISHER 6KG POWDER

stored pressure type

Certified PED 2014/68/EU and EN 3.7

Fire rating 34A – 233B – C




Organic solid materials
wood, rubber, textiles, etc.



Flammable liquids,
gasoline, oil, etc.



Flammable gases,
methane, propane.

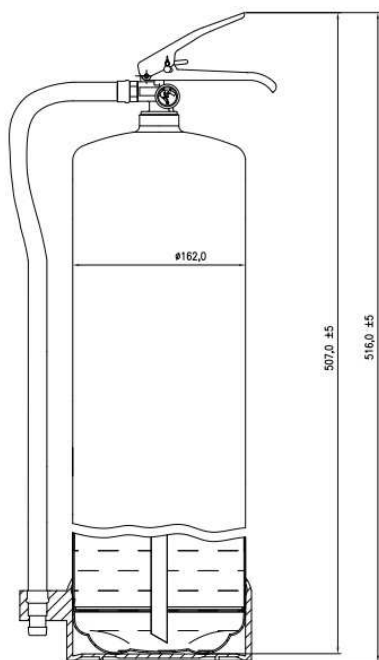

Technical specification

Cylinder diameter _____ : 162 mm
 Material _____ : Steel cylinder
 Operating pressure _____ : 15 bar at 20°C
 Test pressure _____ : 30 bar
 Burst pressure _____ : > 55 bar
 Temperature range _____ : -30°C + 60°C
 Extinguishing agent _____ : ABC powder
 Propellant _____ : N₂ + He
 Nominal charge _____ : 6 kg
 Jet length _____ : ~ 6 m


Dimensions

Height: 516 mm
 Diameter: 162 mm
 Weight: 10 kg

SPARE PARTS LIST

Pos.	Description	Code
1	Complete valve	7204040
1A	Gauge	2120001
1B	Seal	2250008
1C	Safety pin	2100601
1D	Check valve	2170001
1E	Plug check valve	2220200
1F	O-Ring Ø26x3	2090203
1G	Piston group	2380015
1H	Spring	2151200
1I	Tube holder	2160500
2	Dip tube	2230082
3	Cylinder	0010537
4	ABC powder	2020003
5	Complete hose	2330074
6	Label	-

Pos.	Description	Code
7	Bracket	2200064
8	Base (black)	2017450

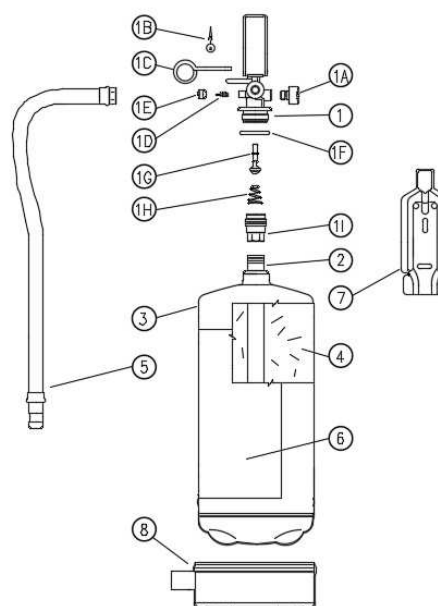

The use of non original spare parts may cause malfunctions loss

Maintenance and Guarantee

Maintenance must be made periodically by, trained and certified staff, according to the local regulations of the country where it is located. The extinguisher is guaranteed for 24 months from the date of the supply. The guarantee includes, repairing or replacement for production defects, unit must be sent back to the factory free of charge, only when authorized written agreement with our sales office has been reached. The guarantee expires in case of tampering and bad maintenance made by not-authorized staff. It must be recharged only by staff authorized and certified by use only original extinguisher agent and spare parts.

Technical data are subject to modification for improvements without prior notice