

Datasheet				
Mod.	Dwg n.	Date	Check	Rev.
9D-34-AB	941359	19/10/2017	AC	0

FOAM FIRE EXTINGUISHER 9L STORED PRESSURE

Certified PED 2014/68/EU and EN 3.7


Fire rating 34A – 183B



Organic solid materials
wood, rubber, textiles, etc.



Flammable liquids,
gasoline, oil, etc.

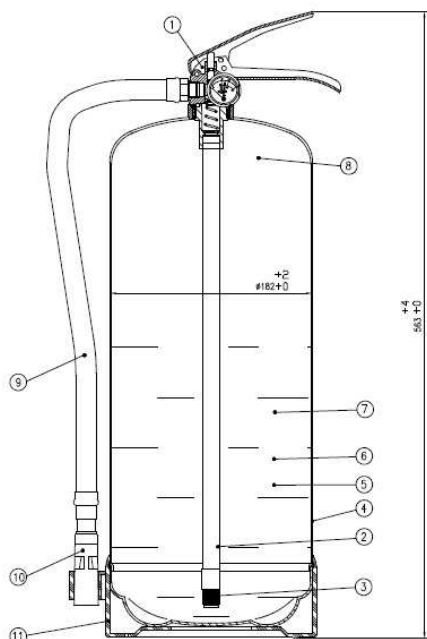

Technical specification

Cylinder diameter _____ : 182 mm
 Material _____ : Steel cylinder internal coated, aluminium valve
 Operating pressure _____ : 15 bar at 20°C
 Test pressure _____ : 30 bar
 Burst pressure _____ : > 55 bar
 Temperature range _____ : 0°C + 60°C
 Extinguishing agent _____ : Water + foam BSX233 + ASX
 Propellant _____ : N₂
 Nominal charge _____ : 9 l
 Jet length _____ : ~ 7 m

Dimensions

Height: 563 mm
 Diameter: 182 mm
 Weight: 11kg

SPARE PARTS LIST

Pos.	Description	Code
1	Complete valve	7204007
2	Dip tube	2230129
3	Filter	2410001
4	Cylinder	0010635
5	Water	2023000
6	Foam BSX 233	2020042
7	Additive ASX	2020041
8	Nitrogen	2020032
9	Hose	2330126
10	Nozzle	2290016
11	Base	2017451

The use of non original spare parts may cause malfunctions loss

Maintenance and Guarantee

Maintenance must be made periodically by, trained and certified staff, according to the local regulations of the country where it is located. The extinguisher is guaranteed for 24 months from the date of the supply. The guarantee includes, repairing or replacement for production defects, unit must be sent back to the factory free of charge, only when authorized written agreement with our sales office has been reached. The guarantee expires in case of tampering and bad maintenance made by not-authorized staff. It must be recharged only by staff authorized and certified by. use only original extinguisher agent and spare parts. Technical data are subject to modification for improvements without prior notice

Total or partial reproduction, of this document is prohibited